

**6.58" ROKKER® XRP Series
LOWER Fairing Speaker Kit
for 2006-2013 Harley® Ultra,
StreetGlide or RoadGlide Custom
with Vented Lower Fairings**

#HL13-6582-XRP

**Installation
Instructions**

Product Overview



J&M's custom lower-fairing speaker/housing kit has been designed for the 2006-2013 Harley Ultra, Ultra Ltd or CVO with Harley VENTED lowers.

The ROKKER Performance Series 6.58" speakers are spec'd at 2 ohms impedance and 200 watts maximum input (130w RMS - 91db sensitivity).

Lightweight waterproof one-piece woven-fiber driver cone with super-rigid metal basket design.

Integral high-output PEI dome tweeter with custom J&M grills included.

These are THE MOST efficient speakers you can buy for your Harley and they will perform extremely well when used by themselves or with a small to medium sized accessory amplifier.


These high-impact quality molded speaker housing inserts are painted vivid black and can be re-painted to match the color of your Bagger.

This kit is 100% plug-n-play with lower speaker wiring harness included.

High-density lite-weight Neodymium magnet structure, specially coated to maintain flux-strength integrity even at extreme operating temperatures.

Installation and Instructions

1. Remove both left and right lower fairing assemblies from the crash bar.
2. Remove the factory storage pocket assemblies from both of the lower fairings.
3. Remove the lower wind deflectors from the factory storage pockets and install them onto the J&M lower speaker inserts.
4. Drill a 7/16" hole at the location shown in each of the factory lowerfairing shells (**See Figure A**).
5. Route the right side speaker harness, (green/green-brown) from front to back, through the previously drilled hole in the right side lower fairing shell, then through the 7/16" hole in the right side J&M lower speaker housing insert and install the insert onto the lower fairing shell using the stock screws that were removed.
6. Adjust the wire harness so that there is approximately 6" of wire extending into the speaker housing.
7. Re-install the right side lower fairing onto the crash bar and route the speaker wire harness along the crash bar, up to and along the factory wiring harness in front of the fuel tank, and plug into the corresponding connector from the J&M amplifier harness. (green/green-brown)

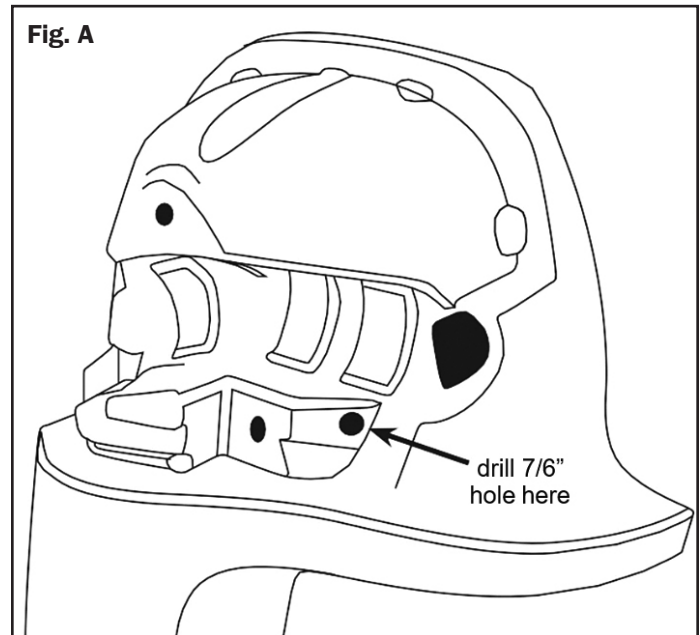

8. Secure the wiring harness to the crash bar with the tie straps provided.

9. Route the speaker wire thru the spacer and then connect the wire terminal spades to the correct terminals on the J&M 6.58" ROKKER speaker assembly. Secure the speaker and grill into the right side speaker housing using the #8 X 1 3/4" self-tapping screws provided.

10 Repeat the entire process for the left side fairing assembly.



Thank you for the confidence you have shown in J&M Corporation by purchasing one of our innovative products.

If you have any question or comments about this product, you may contact us at USA 1-520-624-7000 Monday thru Friday, 8:00AM thru 5:00PM Mountain Standard Time.



1415 S. Cherry Avenue
Tucson, AZ 85713 U.S.A.
Tel (800) 358-0881
Website: <http://www.jmcorp.com>
E-mail: audio@jmcorp.com

WARRANTY AND REPAIR INFORMATION

TWO YEAR LIMITED WARRANTY In order to facilitate the servicing of this warranty, the Warranty Registration Form should be filled out and returned within 10 days of the date of purchase. However, return of the Warranty Registration Form is not a precondition of this warranty, and this Warranty will be observed by **J&M CORPORATION** whether or not the Warranty Registration Form is returned, on the condition that other satisfactory evidence of the date of the original purchase is provided to **J&M CORPORATION**.

WHO PROVIDES THE WARRANTY? This warranty is provided by **J&M CORPORATION**.

WHO IS PROTECTED? This warranty is extended only to the original owner of this J&M CORPORATION product and may not be transferred or assigned.

WHAT IS COVERED AND HOW LONG? This warranty covers all defects in material or workmanship of our product for a period of 2 years from date of original retail purchase. At its option, **J&M CORPORATION** will repair or replace any defective part(s) or equipment.

The provisions of the warranty shall not apply to any unit which has been subjected to misuse, neglect, incorrect mechanical or electrical installation, unauthorized modifications, accident, nor to units which have been repaired or altered outside of our factory.

PROCEDURE FOR OBTAINING PERFORMANCE OF WARRANTY In the event that the product does not conform to this warranty, the product should be shipped prepaid to the **J&M CORPORATION** service facility. Transportation charges, insurance fees, and labor costs for shipment, removal, or reinstallation of our product are not covered by this warranty. Loss or damage in shipment is the sole responsibility of the freight carrier.

FOR YOUR INFORMATION Repair as provided under this warranty is the exclusive remedy of the consumer. **J&M CORPORATION** shall not be liable for any incidental or consequential damages or for breach of any express or implied warranty on this product. Except to the extent prohibited by applicable law, any implied warranty of merchantability or fitness for a particular purpose on this product is limited in duration to the duration of the warranty. Some states do not allow the exclusion or limitation of incidental or consequential damages, or allow limitations on how long an implied warranty lasts, so the above limitations or exclusion may not apply to you. This warranty gives you specific legal rights which vary from state to state.

J&M CORPORATION reserves the right to make changes in design and to make improvements in its products without the obligation to incorporate the changes or improvements in any of its previously manufactured products.

J&M CORPORATION has not authorized anyone to make representations or warranties other than the warranty contained herein.

The above warranty is effective for all products manufactured after 10/01/86.

NON-WARRANTY REPAIR RATES **J&M CORPORATION** reserves the right to change the labor repair rates without prior notice. At the time of this printing the out-of-warranty repair is \$40 per hour for labor only. However, the customer is advised to verify the current rate when he/she calls customer service to obtain the return authorization number.

FACTORY SERVICE ADDRESS J&M Corporation, 1415 S. Cherry Avenue, Tucson, Arizona, 85713, U.S.A. Tel: 1-800-358-0881 audio@jmc corp.com www.jmc corp.com

CUSTOMER SERVICE NUMBER 1-800-358-0881



WARRANTY REGISTRATION FORM

Please fill out this card completely and mail it immediately after purchase. Please be sure that your zip code and serial number (if applicable) are legible. This will help us to serve you better.

(PLEASE PRINT)

Name _____

Address _____

City _____ State _____ Zip _____

Motorcycle Other E-mail _____

Make _____ Model _____ Year _____

Product part number _____

Serial number (if applicable) _____

Date of purchase _____

Name of dealer it was purchased from _____



Mail to:
J&M Corporation
1415 S. Cherry Avenue
Tucson, AZ 85713
U.S.A.