



1747 E 23<sup>RD</sup> ST Tucson AZ 85713 – 1-520-624-7000

[www.jmcorp.com](http://www.jmcorp.com) - - [audio@jmcorp.com](mailto:audio@jmcorp.com)



## Product Manual

Part# MHAS-BLU3B

### JMC ROKKER Bluetooth Powered Self-Amplified Handlebar Speakers Flat-Black Finish


- **Speaker Size:** 3.1" Diameter
- **Speaker Cone Construction:** Black Poly
- **Speaker Enclosures:** High-Impact High-Temp Polycarbonate
- **Frequency Response:** 50-15kHz
- **Magnet Material:** Lightweight Neodymium
- **Mounting Options:** Handlebar Clamp 7/8" 1" or 1 1/4" & Mirror Mount Plate
- **Amplifier Output Power:** 120w Max - 44w RMS (22x2 @ 5% THD)
- **Channel Separation:** >50 db
- **Bluetooth Media Control:** Handlebar-Mounted Weatherproof
- **Bluetooth Profiles:** AVRCP/A2DP Stereo Audio Streaming
- **Optional AUX Input:** 3.5mm Aux Input Jack
- **Operating Voltage:** 10-16 VDC
- **Weather Proof:** Yes

## Installation Precautions

The components and wiring should not be installed around any moving parts, keep away from ignition parts, fuel lines, or hot exhaust.

Speakers should not be installed where they might interfere with specific safety features on the motorcycle (i.e. Lights, horns, brake levers, etc.).

To ensure security of the speakers, always check the mounting conditions (e.g. the bolt tightness and no clamp damage) before each vehicle ride.




## Handlebar Installation

1. Fasten the Clamps to the bottom of each speaker.
2. Determine the preferred mounting location and fit the brackets around the handlebars, using the appropriate sized shims for the specific diameter of the bars.
3. Tighten the mounting screws once the speakers are positioned in the proper location.

## Wire Harness Routing & Connections

1. Remove the fuel tank and seat..
2. Route the fused power/ground leads to the battery. (*keep away from moving parts and/or hot exhaust*)
3. Connect the **RED** ring terminal to the +12V post of the battery.
4. Connect the **BLACK** ring terminal to ground post of the battery.
5. Connect the power connector to the white mating connector leading to the left side speaker housing.

# Connections

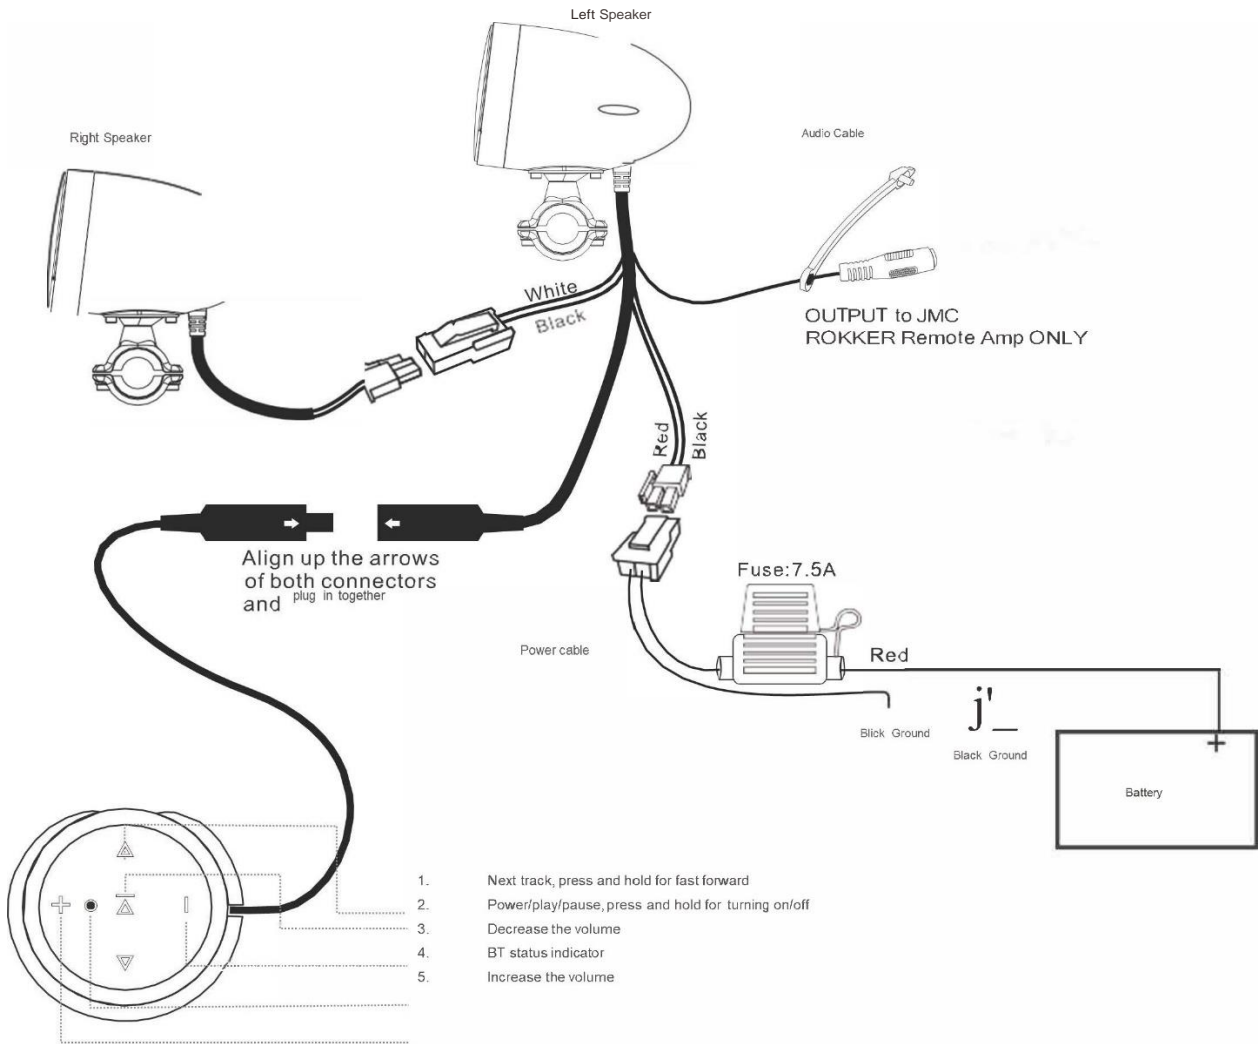

3

## Bluetooth Pairing

To pair and connect your Bluetooth device to the MHAS-BLU3B" Enter Settings> Bluetooth Menu> Search> "JMC ROKKER Blu3"

>If Prompted to enter a passcode enter: "0000"


## Audio OUTPUT Connection for Remote JMC ROKKER Amplifier

1. AUX OUTPUT connection for JMC ROKKER remote amplifier ONLY.

### Installation Mirror Mount Brackets

#### Step 1. Remove standard handlebar mounting bracket.

1. Unbolt the 2 nuts at bottom of speaker housing.
2. Keep bolts and nuts as they will be used later.



#### Step 2. Installing Speaker Mirror Mount extension to speaker housing.

1. Locate the 2 mounting holes on the oval shape on Mirror Mount Extension.
2. Use the bolts and nuts from Step 1 to fix the mirror mount bracket to the bottom of the speaker housing and tighten to secure.

#### Step 3. Installing completed speaker assembly to mirror bracket.

1. Remove Rear view mirrors.
2. Locate the mirror hole on the opposite side of the mirror mount bracket.
3. Using the mirror hole on the mirror mount bracket, screw the mirror assembly back together with the mirror mount bracket.

**Thank you for the confidence you have shown in J&M Corporation by purchasing one of our innovative products.**

**If you have any question or comments about this product, you may contact us at USA 1-520-624-7000 Monday thru Friday, 8:30AM thru 4:30PM Mountain Standard Time.**

